

## Data Sheet

FD30 Fire Blank "IFC PAR/17774/01"

Internal Door

Engineered Construction




### Door Sizes

| Product | Thickness mm | Width mm | Length mm | Width inch | Length inch |
|---------|--------------|----------|-----------|------------|-------------|
| J210    | 45           | 813      | 2032      | 32         | 80          |
| J220    | 45           | 914      | 2134      | 36         | 84          |
| J221    | 45           | 1219     | 2438      | 48         | 96          |

813 / 914 / 1219

2032 / 2134 / 2438

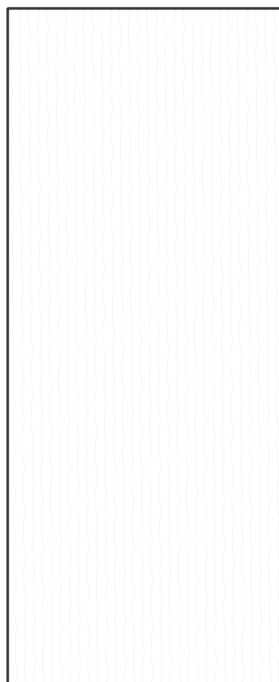

### Material Specification

|                                      |                                                                   |
|--------------------------------------|-------------------------------------------------------------------|
| <b>Construction</b>                  | Stile and Rail Fire-Rated Door Leaf                               |
| <b>Stiles and Rails</b>              | 39.2mm x (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)  |
| <b>Face/Skin</b>                     | 3mm MDF                                                           |
| <b>Core</b>                          | Low-density Fire Core                                             |
| <b>Glazing Type (if applicable)</b>  | -                                                                 |
| <b>Edges</b>                         | Finger-Jointed Softwood                                           |
| <b>Finishing</b>                     | Plywood Veneer                                                    |
| <b>Glue (Face)</b>                   | Glued to the core stiles and rails with UF glue                   |
| <b>Fire Rating</b>                   | FD30 (30-Minute Fire Resistance)                                  |
| <b>Fire Test &amp; Certification</b> | European Standard EN 1634-1 & British Standard CF 292 Warrington. |
| <b>Acoustic Performance</b>          | Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)                         |