

## Data Sheet

FD30 Oak Flush GC06 (metric)


Internal Door

Engineered Construction



### Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J600	45	826	2040	32	80
J601	45	926	2040	36	80
J602	45	1026	2040	40	80

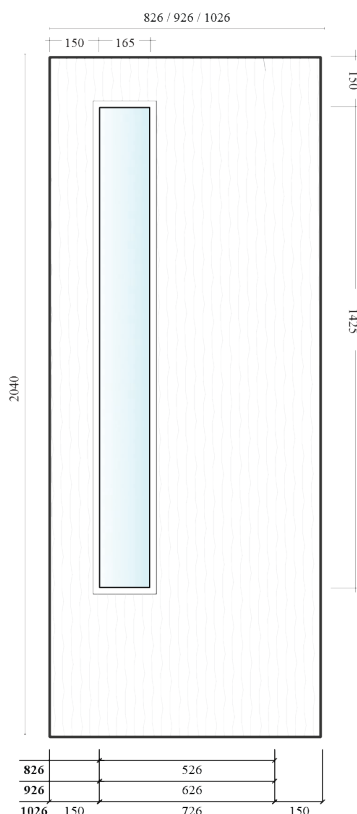

### Material Specification

<b>Construction</b>	Stile and Rail Fire-Rated Door Leaf
<b>Stiles and Rails</b>	39.2mm x (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
<b>Face/Skin</b>	3mm MDF
<b>Core</b>	Low-density Particleboard Fire Core
<b>Glazing Type (if applicable)</b>	Pyroguard EW30 IMPACT Clear glass. (30/0) Thickness: 7mm. Installed with MDF beadings.
<b>Edges</b>	Finger-Jointed Softwood
<b>Finishing</b>	Veneered with Oak Lacquered Veneer
<b>Glue (Face)</b>	Glued to the core stiles and rails with UF glue
<b>Fire Rating</b>	FD30 (30-Minute Fire Resistance)
<b>Fire Test &amp; Certification</b>	European Standard EN 1634-1 & British Standard CF 292 Warrington.
<b>Acoustic Performance</b>	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)