


FD30 Oslo 1P Smooth  
Internal Door  
Engineered Construction

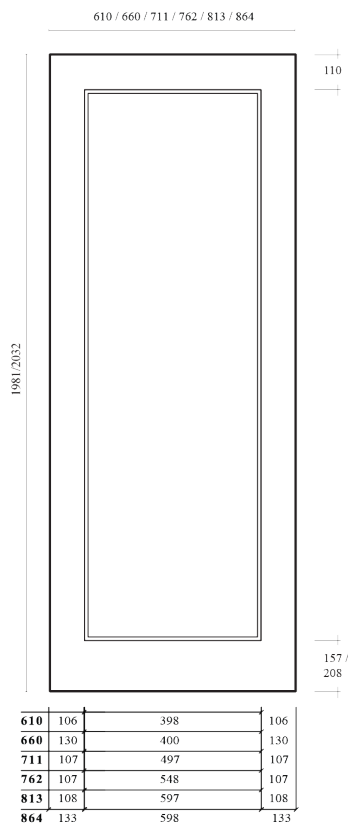

### Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J250	45	610	1981	24	78
J251	45	660	1981	26	78
J252	45	711	1981	28	78
J253	45	762	1981	30	78
J254	45	813	2032	32	80
J255	45	864	2032	34	80

### Material Specification

<b>Construction</b>	Stile and Rail Fire-Rated Door Leaf
<b>Stiles and Rails</b>	39.2mm × (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
<b>Face/Skin</b>	3mm Primed MDF
<b>Core</b>	Low-density Particleboard Fire Core
<b>Glazing Type (if applicable)</b>	-
<b>Edges</b>	Finger-Jointed Softwood
<b>Finishing</b>	Pre-Painted / Primed (Ready for final paint)
<b>Glue (Face)</b>	Glued to the core stiles and rails with UF glue
<b>Fire Rating</b>	FD30 (30-Minute Fire Resistance)
<b>Fire Test &amp; Certification</b>	European Standard EN 1634-1 & British Standard CF 292 Warrington.
<b>Acoustic Performance</b>	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)