


FD30 Primed 1 Glazed ope GC01 (Clear)

Internal Door

Engineered Construction

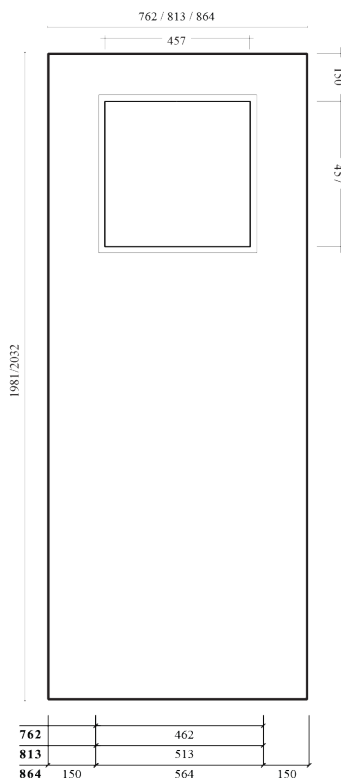

Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J112	44	762	1981	30	78
J113	44	813	2032	32	80
J114	44	864	2032	34	80

Material Specification

Construction	Stile and Rail Fire-Rated Door Leaf
Stiles and Rails	39.2mm × (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
Face/Skin	3mm Primed MDF
Core	Low-density Particleboard Fire Core
Glazing Type (if applicable)	Pyroguard EW30 IMPACT Clear glass. (30/0) Thickness: 7mm. Installed with MDF beadings.
Edges	Finger-Jointed Softwood
Finishing	Pre-Painted / Primed (Ready for final paint)
Glue (Face)	Glued to the core stiles and rails with UF glue
Fire Rating	FD30 (30-Minute Fire Resistance)
Fire Test & Certification	European Standard EN 1634-1 & British Standard CF 292 Warrington.
Acoustic Performance	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)