


FD30 Primed 1 Glazed ope GC06 (clear) (metric)

Internal Door

Engineered Construction

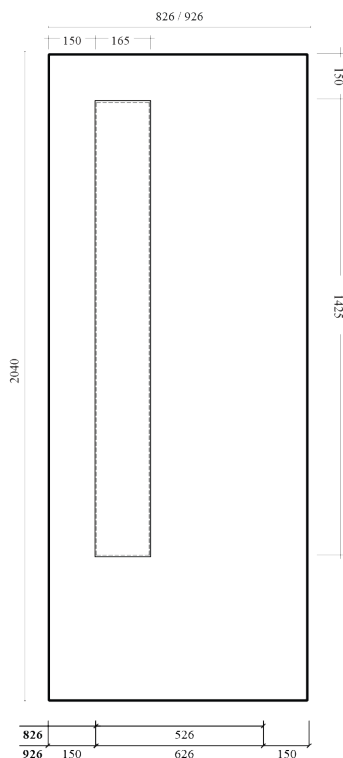

### Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J463	44	826	2040	32	80
J464	44	926	2040	36	80

### Material Specification

<b>Construction</b>	Stile and Rail Fire-Rated Door Leaf
<b>Stiles and Rails</b>	39.2mm x (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
<b>Face/Skin</b>	3mm Primed MDF
<b>Core</b>	Low-density Particleboard Fire Core
<b>Glazing Type (if applicable)</b>	Pyroguard EW30 IMPACT Clear glass. (30/0) Thickness: 7mm. Installed with MDF beadings.
<b>Edges</b>	Finger-Jointed Softwood
<b>Finishing</b>	Pre-Painted / Primed (Ready for final paint)
<b>Glue (Face)</b>	Glued to the core stiles and rails with UF glue
<b>Fire Rating</b>	FD30 (30-Minute Fire Resistance)
<b>Fire Test &amp; Certification</b>	European Standard EN 1634-1 & British Standard CF 292 Warrington.
<b>Acoustic Performance</b>	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)