


Data Sheet

FD60 Primed 1 Glazed ope GC06 (clear) (metric)


Internal Door

Engineered Construction

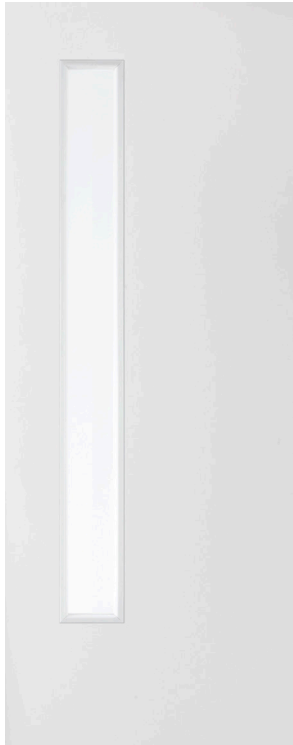

Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J427	55	826	2040	32	80
J428	55	926	2040	36	80

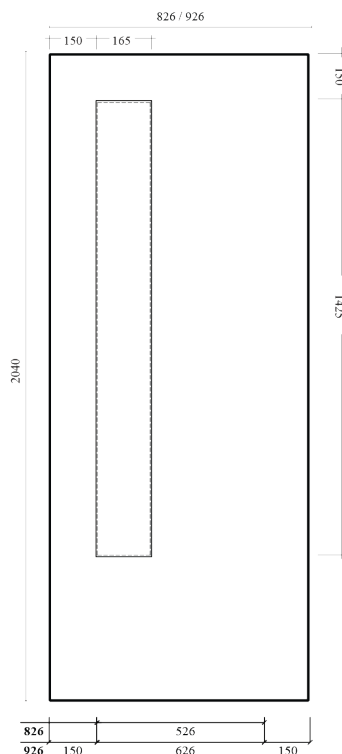

Material Specification

Construction	Stile and Rail Fire-Rated Door Leaf
Stiles and Rails	39.2mm x (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
Face/Skin	8mm Primed MDF
Core	Low-density Particleboard Fire Core
Glazing Type (if applicable)	Pyroguard EW60 Rapide Clear glass. (60/0) Thickness: 11mm. Installed with MDF beadings.
Edges	Finger-Jointed Softwood
Finishing	Pre-Painted / Primed (Ready for final paint)
Glue (Face)	Glued to the core stiles and rails with UF glue
Fire Rating	FD60 (60-Minute Fire Resistance)
Fire Test & Certification	European Standard EN 1634-1 & British Standard CF 292 Warrington.
Acoustic Performance	Rw ≈ 36 dB (tested to UNE ISO 140-3:1995)