
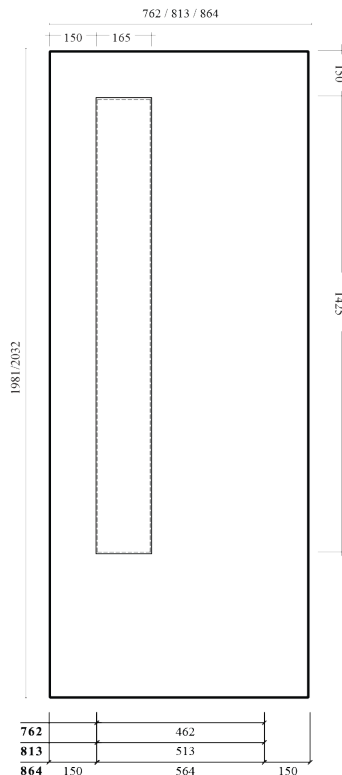


## Data Sheet

FD60 P/Grade 1 Glazed ope GC06 (clear)

Internal Door

Engineered Construction

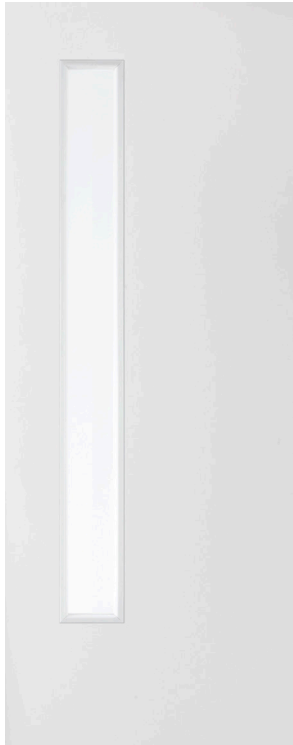

### Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J181	55	762	1981	30	78
J182	55	813	2032	32	80
J183	55	864	2032	34	80

### Material Specification

<b>Construction</b>	Stile and Rail Fire-Rated Door Leaf
<b>Stiles and Rails</b>	39.2mm × (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
<b>Face/Skin</b>	8mm Primed MDF
<b>Core</b>	Low-density Particleboard Fire Core
<b>Glazing Type (if applicable)</b>	Pyroguard EW60 Rapide Clear glass. (60/0) Thickness: 11mm. Installed with MDF beadings.
<b>Edges</b>	Finger-Jointed Softwood
<b>Finishing</b>	Pre-Painted / Primed (Ready for final paint)
<b>Glue (Face)</b>	Glued to the core stiles and rails with UF glue
<b>Fire Rating</b>	FD60 (60-Minute Fire Resistance)
<b>Fire Test &amp; Certification</b>	European Standard EN 1634-1 & British Standard CF 292 Warrington.
<b>Acoustic Performance</b>	Rw ≈ 36 dB (tested to UNE ISO 140-3:1995)