


Data Sheet

FD30 York 6P Smooth

Internal Door

Engineered Construction

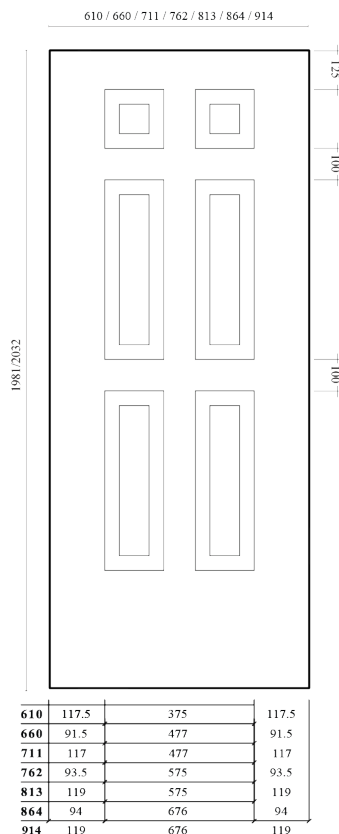

Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J273	45	610	1981	24	78
J274	45	660	1981	26	78
J275	45	711	1981	28	78
J276	45	762	1981	30	78
J277	45	813	2032	32	80
J278	45	864	2032	34	80
J279	45	914	2032	36	80

Material Specification

Construction	Stile and Rail Fire-Rated Door Leaf
Stiles and Rails	39.2mm × (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
Face/Skin	3mm Primed MDF
Core	Low-density Particleboard Fire Core
Glazing Type (if applicable)	-
Edges	Finger-Jointed Softwood
Finishing	Pre-Painted / Primed (Ready for final paint)
Glue (Face)	Glued to the core stiles and rails with UF glue
Fire Rating	FD30 (30-Minute Fire Resistance)
Fire Test & Certification	European Standard EN 1634-1 & British Standard CF 292 Warrington.
Acoustic Performance	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)