


Data Sheet

1 Panel Primed Shaker

Internal Door

Solid Hardwood

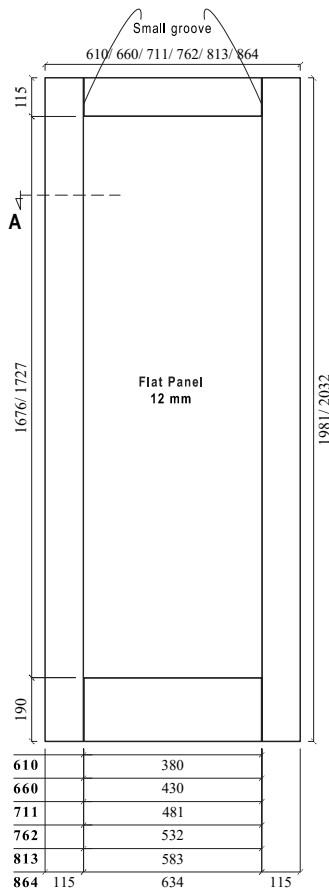

Door Sizes

| Product | Thickness mm | Width mm | Length mm | Width inch | Length inch |
|---------|--------------|----------|-----------|------------|-------------|
| A0512 | 44 | 610 | 1981 | 24 | 78 |
| A0513 | 44 | 660 | 1981 | 26 | 78 |
| A0514 | 44 | 711 | 1981 | 28 | 78 |
| A0515 | 44 | 762 | 1981 | 30 | 78 |
| A0516 | 44 | 813 | 2032 | 32 | 80 |
| A0517 | 44 | 864 | 2032 | 34 | 80 |

Material Specification

| | |
|----------------------------------|---|
| Stile, Rail & Mullion | 10mm (outside) 4mm (inside) Solid HW - Stile Lipping |
| Core: | SR&M Panels |
| Face / Skin | 44mm PB 12mm PB |
| Glazed Type if Applicable | 3mm MDF |
| Finishing | No |
| Glue | White Prime 1x UV Roll Filler Natural 1x UV Roll Primer White Techbond L558, SL2014, 3400 Polichemy EPI (Emulsion Polimeric Isocyanat) |
| | PC3479 Polichemy PVAC (Polyvinyl Acetate) |

Packaging

| | |
|---------------------------|-----------------|
| Kind of Packaging | Plastic Wrapped |
| Qty on each Pallet | 22 pcs |