




# Bearfoot

## VISTA | ULTRA

### Technical Data Information

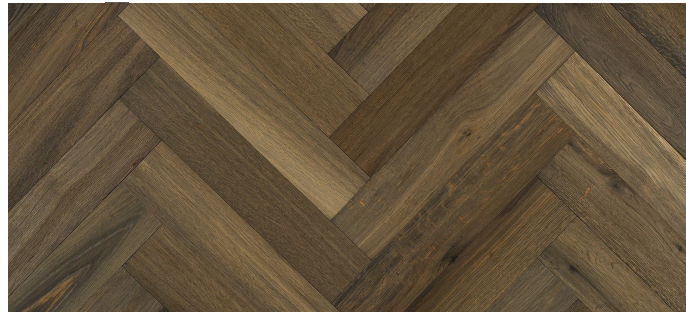

<b>Product Details</b>	<b>PO NO.:</b>			
	<b>Item Color:</b>	Sea fog		
	<b>Struction;</b>	Multi-layer Engineered Wood Flooring -Herringbone		
	<b>Specification:</b>	18/4*90*450		
	<b>Species:</b>	European Oak	<b>Plywood:</b>	Eucalyptus mixed Poplar
	<b>Grade :</b>	ABCD	<b>Moisture Content (MC):</b>	6-8%
	<b>Bevel:</b>	0.5 for 4 side	<b>Gloss:</b>	About 5(AS SAMPLE)
	<b>Filler:</b>	Black filler	<b>Surface finishment</b>	Brush ,Penetrative Reactive stain , Uv Oil
	<b>Glue Brand</b>	Dynea	<b>Lac Brand:</b>	Treffert
	<b>LOC System</b>	Tongue and Groove	<b>Installation:</b>	Floating/Gluedown/Nail down
<b>Maufacturing Process</b>	<p>Selecting veneer and Prepare plywood material→Veneer Penetrate reactive →Drying and Balance(40℃-60℃)→Pressing→Repair knots→Fixed length and width→Sanding →Brush →Proflie(Tongue and groove)→Reactive stain on surface →Stain color and Coating→ Packaging</p>			
<b>Technical Date(CE)</b>	<b>Essential Characteristics</b>	<b>Performance</b>	<b>Harmonised Technical Specification</b>	
	Fire Reaction	Dfl-s1	EN 14342: 2013	
	Formaldehyde Emission according to EN 717-1:2005	E1		
	Content of PCP according to CEN/TR 14823:2004	PCP ≤5X10 <sup>-6</sup> n		
	Breakcage Resistance	NPD		
	Sliding	NPD		
	Thermal Conductivity	0.13W/mK		
Byological Durability	Class 1			
<b>Certificates</b>	CE,FSC,Floorscore,VOC,CARBIL...			