


FD30 Carrara 2 Panel Smooth  
Internal Door  
Engineered Construction

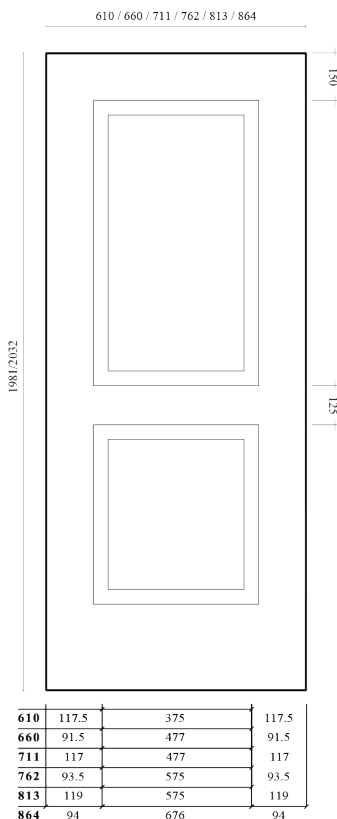

### Door Sizes

Product	Thickness mm	Width mm	Length mm	Width inch	Length inch
J266	44	610	1981	24	78
J267	44	660	1981	26	78
J268	44	711	1981	28	78
J269	44	762	1981	30	78
J270	44	813	2032	32	80
J272	44	864	2032	34	80

### Material Specification

<b>Construction</b>	Stile and Rail Fire-Rated Door Leaf
<b>Stiles and Rails</b>	39.2mm x (38-19)mm Engineered Pine (2 Vertical Stiles + 2 Rails)
<b>Face/Skin</b>	3mm Primed MDF
<b>Core</b>	Low-density Particleboard Fire Core
<b>Glazing Type (if applicable)</b>	-
<b>Edges</b>	Finger-Jointed Softwood
<b>Finishing</b>	Pre-Painted / Primed (Ready for final paint)
<b>Glue (Face)</b>	Glued to the core stiles and rails with UF glue
<b>Fire Rating</b>	FD30 (30-Minute Fire Resistance)
<b>Fire Test &amp; Certification</b>	European Standard EN 1634-1 & British Standard CF 292 Warrington.
<b>Acoustic Performance</b>	Rw ≈ 32 dB (tested to UNE ISO 140-3:1995)